

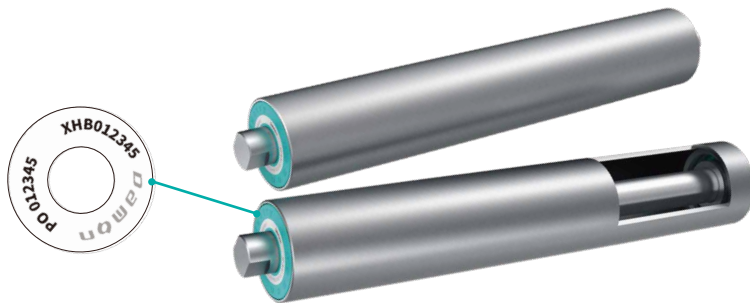


BP-R Series Pulley (Fixed Shaft)

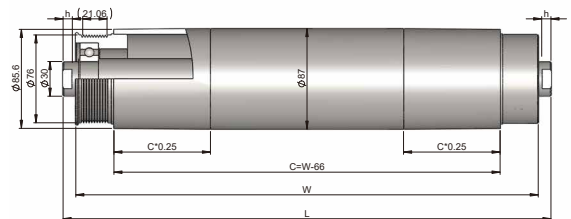

- Configured with precision bearings
- Precision machining, smooth rotation
- High load capacity, reliable and durable.

Dimensions(Steel Z/P)

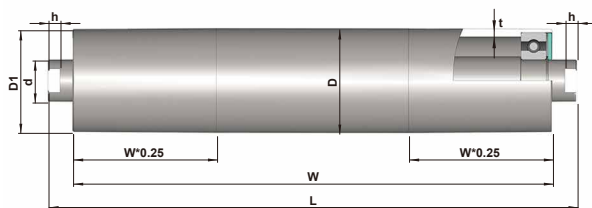

Usually used for climbing belt conveyor

Specifications

Standard						Length			Remarks
Series	Tube dia. (D)	Tube (t)	shaft dia. (d)	Bearing type	Drum (D1)	W	L	Shaft unilateral outcrop	
05D	Φ51	(3.0)	Φ20	6204	/	450~1300	≤1500	≤100	
06C	Φ59	(4.5)	Φ25	6205	Φ58	70~1300	≤1500	≤100	
07C	Φ69	(6.0)	Φ30	6206	Φ68	70~1300	≤1600	≤150	
08K	Φ75	(4.5)	Φ25	6005	Φ74	120~1300	≤1500	≤100	
08C	Φ79	(4.5)	Φ25	6005	Φ77.6	120~1300	≤1500	≤100	
08J	Φ87	(4.5)	Φ25	6205	Φ85.6	120~1300	≤1500	≤100	
10B	Φ100	(6.0)	Φ30	6306	Φ98	120~1800	≤2100	≤150	
11D	Φ112	(6.0)	Φ30	6306	Φ110	120~1800	≤2100	≤150	
			Φ35	6307					
12A	Φ119	(6.0)	Φ30	6306	Φ117	120~1800	≤2100	≤150	
08J	Φ87	(4.5)	Φ30	6206	Φ85.6	180~1300	≤1600	≤150	
									Steel Poly-vee

⚙ Straight tube is available-not tapered ; “(t)”is not accurate data.

If there is dynamic balance requirement for products, please contact us.

Surface treatment:zinc plated or anti-rust oil