


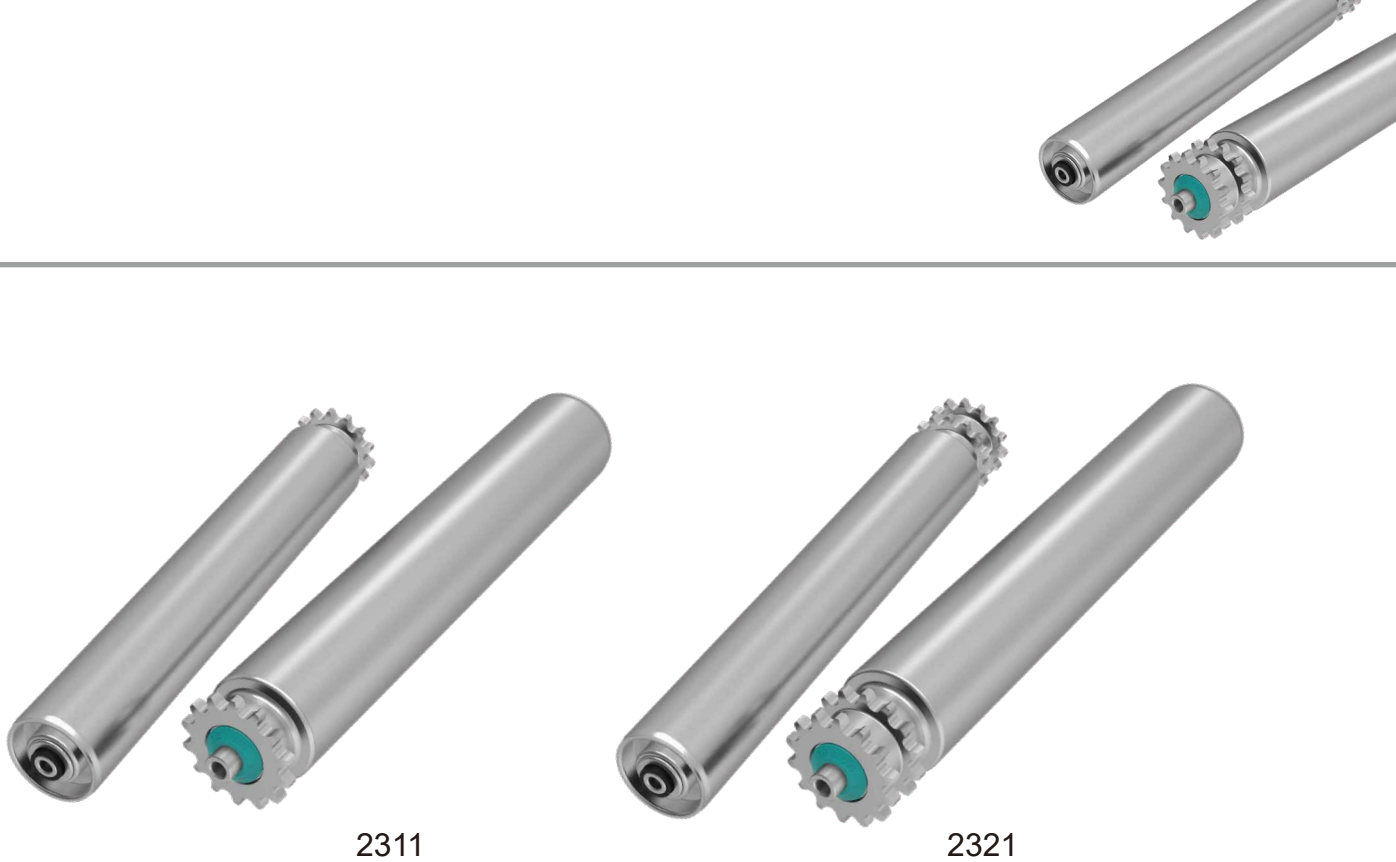

2311

2321

2311/2321 Series

Steel Single/Double Sprocket Roller

Product Features






- Welding the steel sprocket to the steel tube gives it the capacity to transmit high torque and meet the requirements for heavy duty transportation.
- The precision ball bearing is pressed tightly into the steel bearing housing for maximum durability.
- The environmental working conditions are broad. They can be used in both high and low temperature applications.
- Anti-static design.
- The covering on the outside of the sprocket protects the bearings by providing excellent resistance to dust and splashed water.
- Temperature range: $-5^{\circ}\text{C} \sim +40^{\circ}\text{C}$, Remove the end cap (green) and retaining ring (black), the temperature can reach $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$.

Parameters


Bearing Unit	
Bearing house	Steel, zinc plated
Precision ball bearing	6001/6202/6204
Ground sleeve	Polyamide ,black
Driving element	
Sprocket	Steel

2311/2321 Series Driven Conveyor Roller

2311/2321 Series Load Capacity

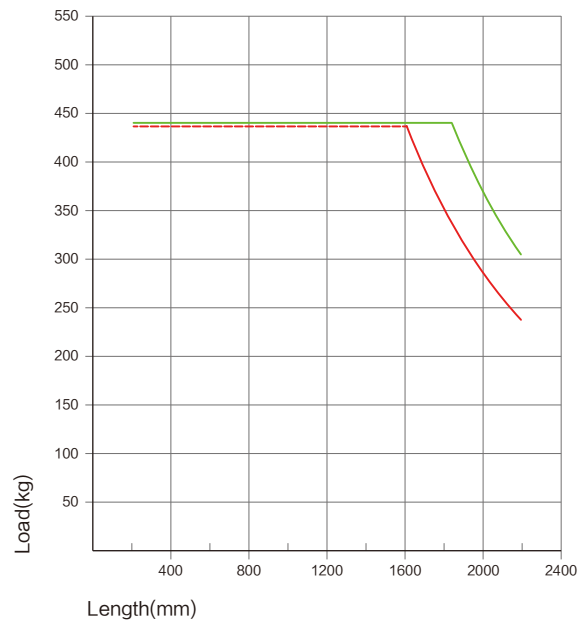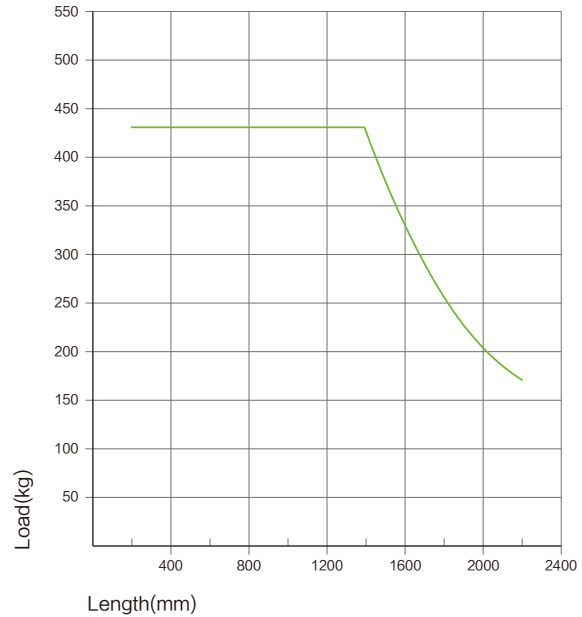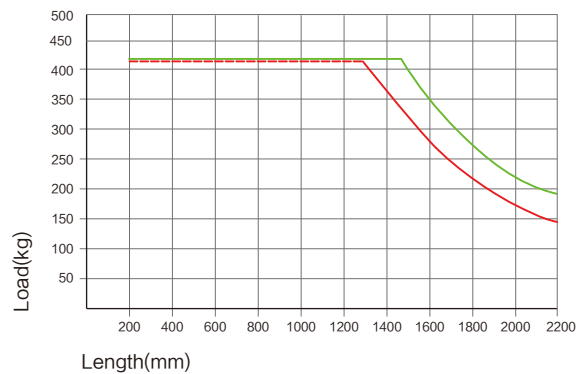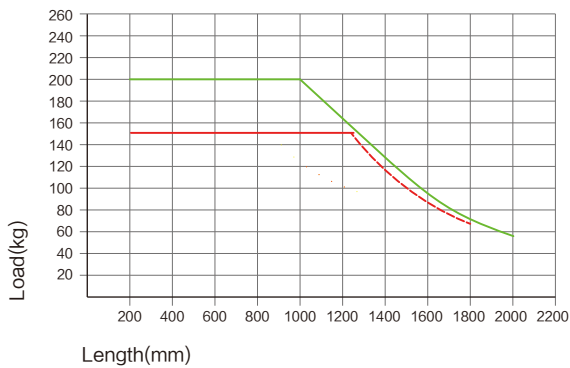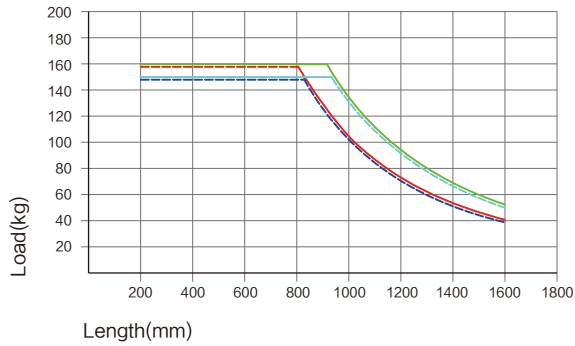

⚠ Above data shows the static load capacity of the roller for a uniformly distributed load.
You should also consider the chain tension, motor power drive factors, calculation based on the smallest value.

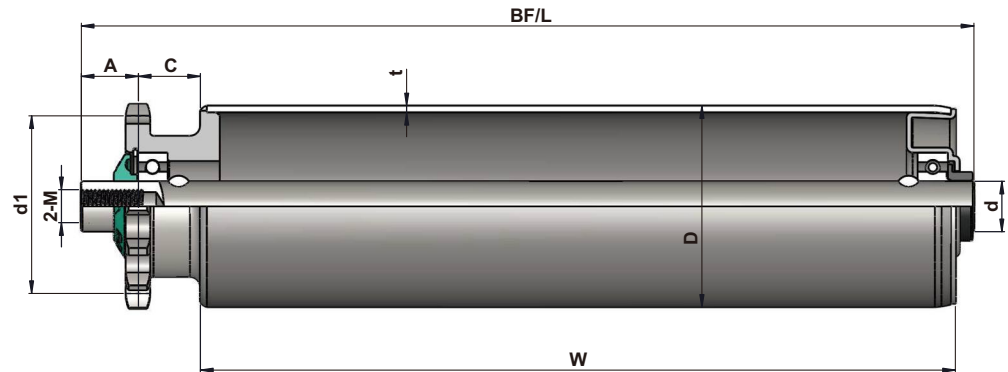

2311 Series Internal Thread

Tube Dia.(D)	Shaft Dia.(d)		Spocket style	A	C	d1
Φ50	Φ12	BF/L=W+40	08B11T	17	18.5	Φ45.08
Φ50	Φ15	BF/L=W+41	08B14T	17	18.5	Φ57.07
Φ60	Φ12/15	BF/L=W+41	08B14T	17	18.5	Φ57.07
Φ76	Φ15	BF/L=W+41	08B14T	17	18.5	Φ57.07
Φ76	Φ20	BF/L=W+44	10A13T	20	18.5	Φ66.33
Φ80	Φ20	BF/L=W+44	10B15T	20	18.5	Φ76.35
Φ89	Φ20	BF/L=W+44	10B15T	20	18.5	Φ76.35

Tube	D*T	Shaft Dia.(d)		
		Φ12 (M8x15)	Φ15 (M10x20)	Φ20 (M12x25)
Steel, zinc plated	Φ50x1.5	2.311.SHC.ACC	2.311.SHC.ADC	
	Φ50x2.0	2.311.SWC.ACC	2.311.SWC.ADC	
	Φ60x2.0	2.311.SOC.ACC	2.311.SOC.ADC	
	Φ60x3.0		2.311.JLA.ADC	
	Φ76x3.0		2.311.JSA.ADC	2.311.JSA.AEC
	Φ76x4.0			2.311.JRB.AEC
	Φ80x3.0			2.311.J6A.AEC
	Φ89x3.0			2.311.JYA.AEC
Steel, zinc plated with steel flange	Φ89x4.0			2.311.JUB.AEC
	Φ60x3.0		2.311.JLG.ADC	
	Φ76x3.0			2.311.JSG.AEC
	Φ76x4.0			2.311.JRG.AEC
	Φ80x3.0			2.311.J6G.AEC
	Φ89x3.0			2.311.JYG.AEC
High-strength steel, Zinc-plated	Φ89x4.0			2.311.JUG.AEC
High-strength steel, Zinc-plated, with steel flange	Φ80x2.0			○
Stainless steel (304)	Φ80x2.0			○
	Φ50x1.5	2.311.NHC.BCC	2.311.NHC.BDC	
	Φ60x2.0	2.311.NOC.BCC	2.311.NOC.BDC	
Stainless steel, with stainless steel flange(304)	Φ76x3.0		2.311.NSC.BDC	2.311.NSC.BEC
	Φ60x2.0	2.311.NOG.BCC	2.311.NOG.BDC	
	Φ76x3.0		2.311.NSG.BDC	2.311.NSG.BEC




Φ50、60 rollers can be fitted with PVC sleeve (2mm)

Φ50 rollers can be fitted with PU sleeve (2mm/3mm).

PVC/PU sleeve is not anti-static.

If steel pallets are transported, the risk of wear on roller surface is higher, please contact us in advance.

2311/2321 Series Driven Conveyor Roller

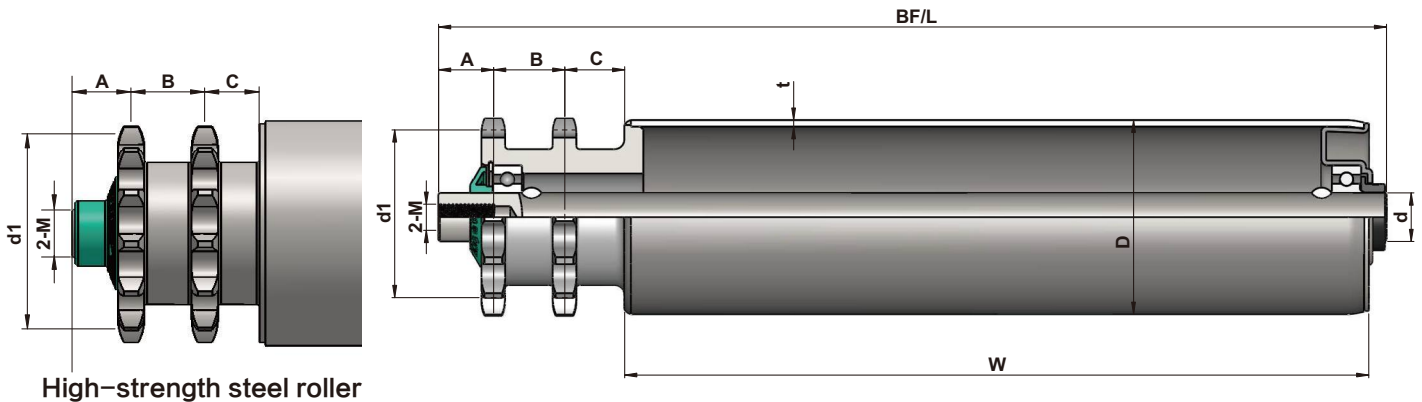

High-strength steel roller

2321 Series Internal Thread


Tube Dia.(D)	Shaft Dia.(d)		Spocket style	A	B	C	d1
Φ50	Φ12	BF/L=W+62	08B11T	17	22	18.5	Φ45.08
Φ50	Φ15	BF/L=W+63	08B14T	17	22	18.5	Φ57.07
Φ60	Φ12/15	BF/L=W+63	08B14T	17	22	18.5	Φ57.07
Φ76	Φ15	BF/L=W+63	08B14T	17	22	18.5	Φ57.07
Φ76	Φ17/20	BF/L=W+69	10A13T	20	25	18.5	Φ66.33
Φ80	Φ20	BF/L=W+69	10B15T	20	25	18.5	Φ76.35
Φ89	Φ20	BF/L=W+69	10B15T	20	25	18.5	Φ76.35

Tube	D*T	Shaft Dia.(d)			
		Φ12 (M8x15)	Φ15 (M10x20)	Φ17 (M12x25)	Φ20 (M12x25)
Steel, zinc plated	Φ50x1.5	2.321.SHC.ACC	2.321.SHC.ADC		
	Φ50x2.0	2.321.SWC.ACC	2.321.SWC.ADC		
	Φ60x2.0	2.321.SOC.ACC	2.321.SOC.ADC		
	Φ60x3.0		2.321.JLA.ADC		
	Φ76x3.0		2.321.JSA.ADC		2.321.JSA.AEC
	Φ76x4.0				2.321.JRB.AEC
	Φ80x3.0				2.321.J6A.AEC
	Φ89x3.0				2.321.JYA.AEC
Steel, zinc plated with steel flange	Φ89x4.0				2.321.JUB.AEC
	Φ60x3.0		2.321.JLG.ADC		
	Φ76x3.0				2.321.JSG.AEC
	Φ76x4.0				2.321.JRG.AEC
	Φ80x3.0				2.321.J6G.AEC
	Φ89x3.0				2.321.JYG.AEC
High-strength steel, Zinc-plated	Φ89x4.0				2.321.JUG.AEC
	Φ76x2.0			2.321.GXA.APC	
High-strength steel, Zinc-plated with steel flange	Φ80x2.0				○
	Φ76x2.0			2.321.GXG.APC	
High-strength steel, Zinc-plated with Steel Flange	Φ80x2.0				○
	Φ50x1.5	2.321.NHC.BCC	2.321.NHC.BDC		
	Φ60x2.0	2.321.NOC.BCC	2.321.NOC.BDC		
Stainless steel, with stainless steel flange(304)	Φ76x3.0		2.321.NSC.BDC		2.321.NSC.BEC
	Φ60x2.0	2.321.NOG.BCC	2.321.NOG.BDC		
	Φ76x3.0		2.321.NSG.BDC		2.321.NSG.BEC

- ⚙️ Φ50、60 rollers can be fitted with PVC sleeve (2mm)
- Φ50 rollers can be fitted with PU sleeve (2mm/3mm).
- PVC/PU sleeve is not anti-static.
- If steel pallets are transported, the risk of wear on roller surface is higher, please contact us in advance.



Steel Flange

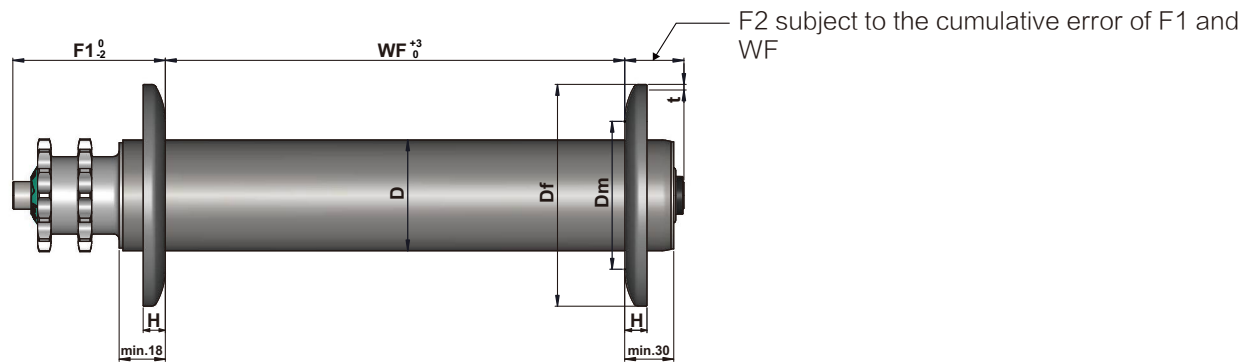


Unit: mm

D	Df	Dm	H	t
Φ60	Φ120	Φ80	12	3
Φ76	Φ135	Φ88.5	16.5	4
Φ80	Φ150	Φ110	18	4
Φ89	Φ150	Φ110	18	4

1. Steel flange and tube are welded together making it strong and durable.
2. Steel tube only.

Stainless steel Flange(304)

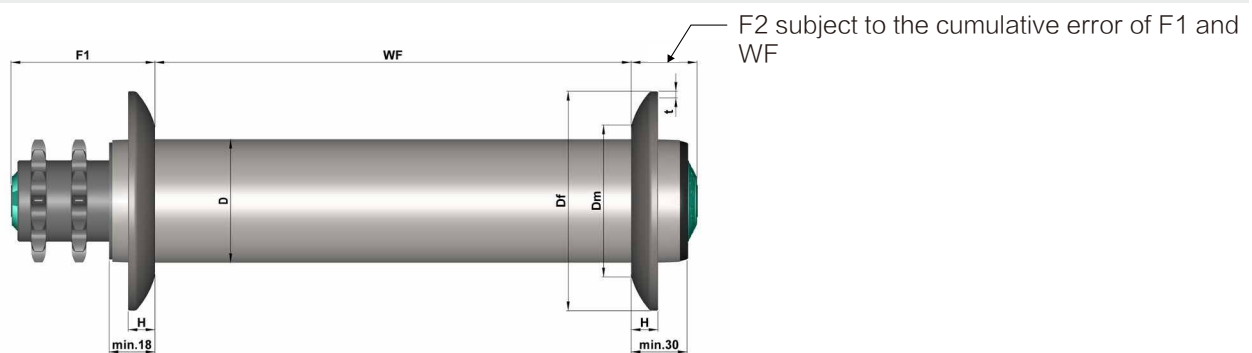

Unit: mm

D	Df	Dm	H	t
Φ60	Φ120	Φ80	12	3
Φ76	Φ135	Φ88.5	16.5	3

1. Stainless Steel flange and tube are welded together making it strong and durable.
2. Stainless Steel tube only.